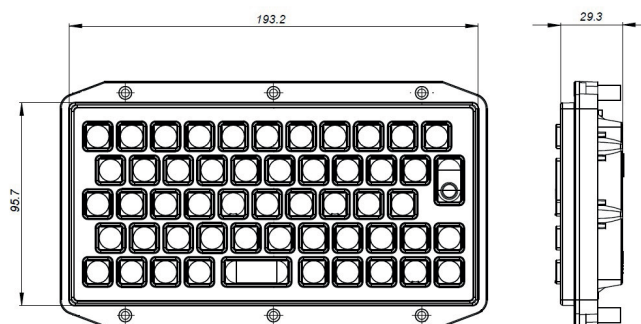# Storm IXP

This compact Storm keyboard is ideal for applications where a responsive and reliable keyboard is required but panel space is limited.

These highly tactile, full travel keyboards are suitable for alpha / numeric data entry in exposed or public environments. Their construction is highly resistant to damage caused by hard use or abuse. They are sealed against water and dust to ensure reliable and responsive data entry in the most demanding situations.

- This compact Storm keyboard is ideal for applications where adult finger sized, full travel keys are required but panel space is limited.

- Robust, water resistant construction for use in exposed or unsupervised applications.

- Sealed to allow regular and frequent sanitation using sprayed liquids and cleaning solutions containing mild concentrations of bleach or alcohol.

- Responsive keys move with a positive tactile dynamic.

- Captured keytops feature high contrast graphics permanently laser marked in black onto a durable white polymer keytop material. Keys are raised above the surrounding surfaces and are bordered in black to clearly denote each keytop's operational boundaries.

- The F, J and Down Arrow keys feature embossed tactile idents (home pips). The enter key features an embossed circular tactile ident.

- Connection to the host system is via a single USB cable (factory fitted).

- Enumerates in Windows as an HID keyboard device.

2205 Series Compact Keyboard	Part Numbers
2205 KBD, VR, White Keys, USB, UK Layout	2205-55201
2205 KBD, VR, White Keys, USB, US Layout	2205-55202

Other languages available, please contact sales@storm-interface.com

Storm Interface products are developed primarily for use with current and supported Microsoft Windows® platforms. For use with a non-Windows® platform, please contact Storm Interface for advice. Compatibility with non-Windows® platforms or operating systems cannot be guaranteed.

Environmental

Operational Temperature Range (Dry, Non Condensing):	-20°C to +70°C
Vibration & Shock:	ETSI 300 019 5M3
Resistance to Water and Dust:	IP65 (when fixed to a suitable panel)
Vibration & Shock:	ETSI 300 019 5M3
Impact Resistance:	IK09 (10J)

Specification / Performance

Rating:	5V DC ±0.25V, 60mA
Operational Key Life:	4 Million cycles(min) per key
Key Actuation Force (nominal):	100g
Key Travel (nominal):	1.5mm
Host System & O/S Compatibility:	Windows 10
Connectivity to host system:	USB 2.0 Type A, 2.5m cable (factory fitted)
Ground connection:	10cm with ring terminal to suit M3 stud
Certification:	CE, FCC, UL

RETAIL
CORPORATE
CIVIC
INDUSTRIAL

For more information & to order visit:
www.storm-interface.com

Whilst every effort is made to ensure details are correct at time of print, specifications are subject to change without notice.

KMA KIOSK MANUFACTURER ASSOCIATION
KIOSK TECHNOLOGY MOVING FORWARD

bsi. FM 39602

UKAS MANAGEMENT SYSTEMS 003